

How to order your paving:

Via your paving contractor-

Discuss with your paving contractor your exact requirements for the garden. Ensure that they are written down, as this will avoid any confusion from either party. The paving contractor will normally order their own materials. If you wish to order the materials yourself, then ask the contractor to confirm the quantities required. Go to any of the Roadstone Retail outlets with the details and the order will then be processed for collection or delivery.

If you are ordering by yourself –

The Paving itself

For Paving, Flags or Natural Stone.
Decide on the type, colour, size and thickness first.

Paving Quantity -

Calculate the overall areas of paving that are required – (length by width) = Square Meters (M²) and add between 3-5% waste / tolerance. If using a colour/size mix, decide on the percentage of colours/sizes

This is a critical measurement – everything else that you need will be based on these figures.

Edge Restraint

What type is required? – Castlestone Kerb, Standard Kerb, Edge Pro, Half Battered Kerb or Other type?
How many linear meters do you need ?
Do you need any concrete to haunch the kerb blocks / edge restraints?

Channel Blocks

Are they required? What colour and how many linear meters are required?

Grit Sand

How much sand do you need to lay the paving on ?
Usually calculated by volume – Area (length x width) x depth = Cubic Meters (M³)
1.6 M³ would usually cover 10 M² by 50mm deep = 1 tonne

Compacted Stone Sub-base

How much stone do you need for the sub-base?
Usually calculated by volume – Area (length x width) x depth = Cubic Meters (M³)

Kiln Dried Sand


For brushing in over the paved area.

Jointing Compound

For filling in the joints between the natural stone / paving.

If you have any questions or queries regarding ordering the paving, please bring a complete listing of your measurements to any of our Retail outlets, where a member of staff will be able to assist you.

Quick Guide to Help you.....

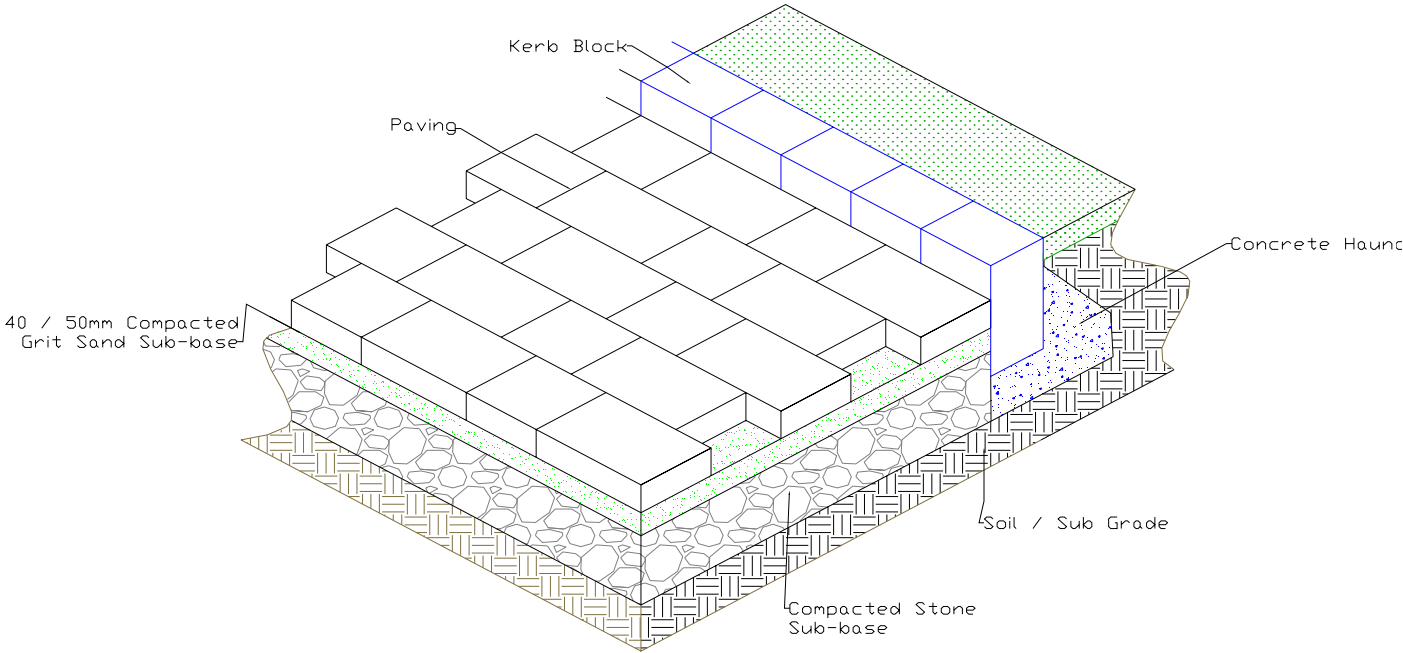

Paviours

Type	Width	Breath	Qty per M ²	M ² per Bale	Order Qty	Weight Per Bale	Kiln Dried Sand
Cobblesett							
80mm	0.200	0.100	50	10.00	Pallet	1.80	7
60mm	0.200	0.100	50	12.00	Pallet	1.62	8
Drivestone							
50mm	0.160	0.160	39	12.92	Pallet	1.45	9
	0.120	0.160	52	12.92	Pallet	1.45	9

	0.080	0.160	78	6.46	Bag	0.73	9
Castlestone / Allenstone							
80mm	0.240	0.160	26	9.23	Pallet	1.66	7
	0.160	0.160	39	9.23	Pallet	1.66	7
	0.120	0.160	52	9.23	Pallet	1.66	7
	0.080	0.160	78	4.61	Bag	1.66	7
60mm	0.240	0.160	26	11.04	Pallet	1.49	8
	0.160	0.160	39	11.04	Pallet	1.49	8
	0.120	0.160	52	11.04	Pallet	1.49	8
	0.080	0.160	78	5.52	Bag	0.75	8
Thomond - 60mm	Mixed	Pallet		13.84	Pre Mixed	1.87	8
Bergerac - 60mm	Mixed	Pallet		11.40	Pre Mixed	1.54	6 - Stab

Note: Bergerac only uses Stabilising Sand

Paving Flags

Type	Size	Qty per	Qty per Bale	M ² Per Pallet	Unit Weight - Kg
Settstone					
60mm	300x300	11.11	144.00	12.96	12.15
All Flags					
50mm	400x400	6.25	40.00	6.40	17.00
	400x600	4.17	20.00	4.80	26.00
	600x600	2.78	20.00	7.20	39.00
63mm	400x400	6.25	32.00	5.12	21.00
	400x600	4.17	16.00	3.84	32.00
	600x600	2.78	16.00	5.76	50.00

Concrete Paving Flags and Paving accessories are mostly sold by the unit.

Sand and Hardcore

Type	Volume	1 M ³	5 M ³	10 M ³	Loose Load
Grit Sand	Approx Tonnage	1.6	8	16	22
Hardcore (804)	Approx Tonnage	2.3	11.5	23	23
Note: Orders under 10Tn may bag be bagged					

Please check with your local Roadstone Retail or John A Woods outlets on order quantise for Natural Stone and Coloured Aggregates.

With your completed order and quantities in hand, visit your Roadstone Retail / JA Wood outlet. Confirm with our staff the order, and arrange a delivery date to suit. When arranging the delivery date, please ensure that somebody will be present to accept delivery. Always provide at least 2 contact phone numbers.

Prior To Delivery:

Ensure the sufficient clear space is available for your new paving. Identify were, if possible, you would like the Roadstone driver to place your paving. This may reduce the amount of handling / moving that you might have to do. If you have any items of concern, please advise our staff when agreeing the delivery.

If you are forced to leave the paving on a public area, the responsibility is the homeowners to ensure that the items are clearly visible to traffic, and that they do not cause a hazard to any other parties.

Roadstone and its associates do not accept any liability arising from any incidents caused after the original delivery.

Upon Delivery:

If you require any product to be located in a particular area, please inform the driver upon his arrival. Check against the delivery docket, that all the items listed are included. If you notice any discrepancy, please notify the driver immediately. If an item is ordered and not included on the delivery docket, please call the office where the order was made from.

Most paving products will have a factory fitted protective cover. If for any reason one is not present, please cover the product. If any bags of cement are on the order, please move them indoors for protection. All bagged sand and aggregate products should also be kept covered in order to maintain the moisture content.

